



Toronto 1 1/8" (149 5/8"x110 1/4")

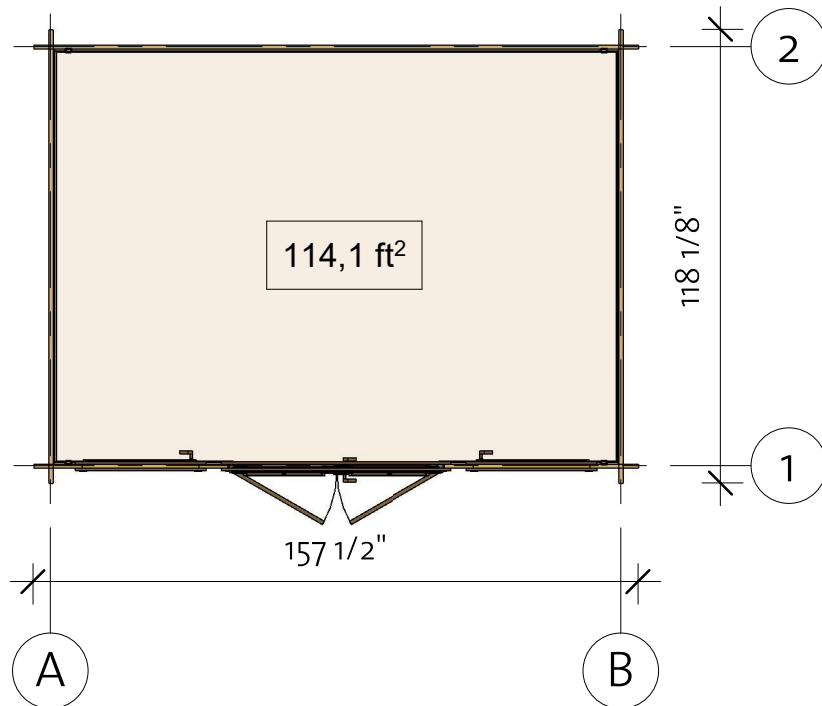

Toronto 1 1/8" (149 5/8"x110 1/4")


Foundation

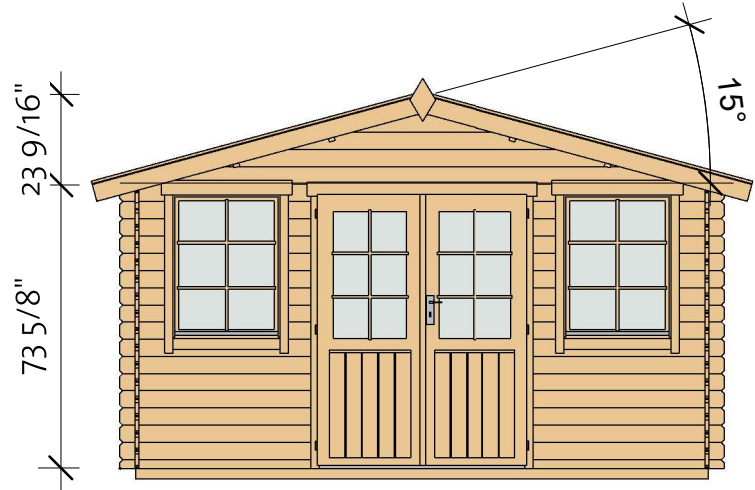


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		6	149 3/16"

Toronto 1 1/8" (149 5/8"x110 1/4")

Floor Plan


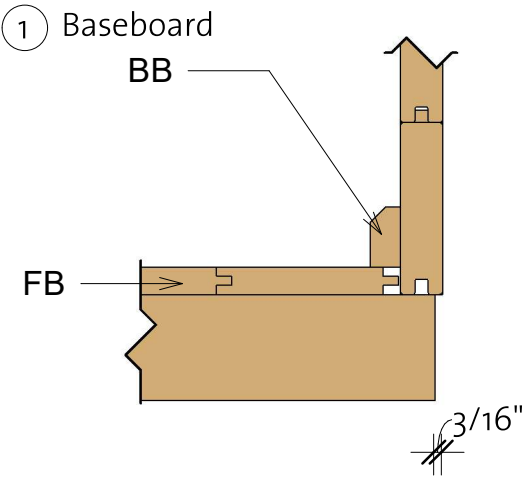


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 18x110		35	107 7/8"
BB1	BB 20x40		2	149 5/8"
BB2	BB 20x40		2	110 1/4"

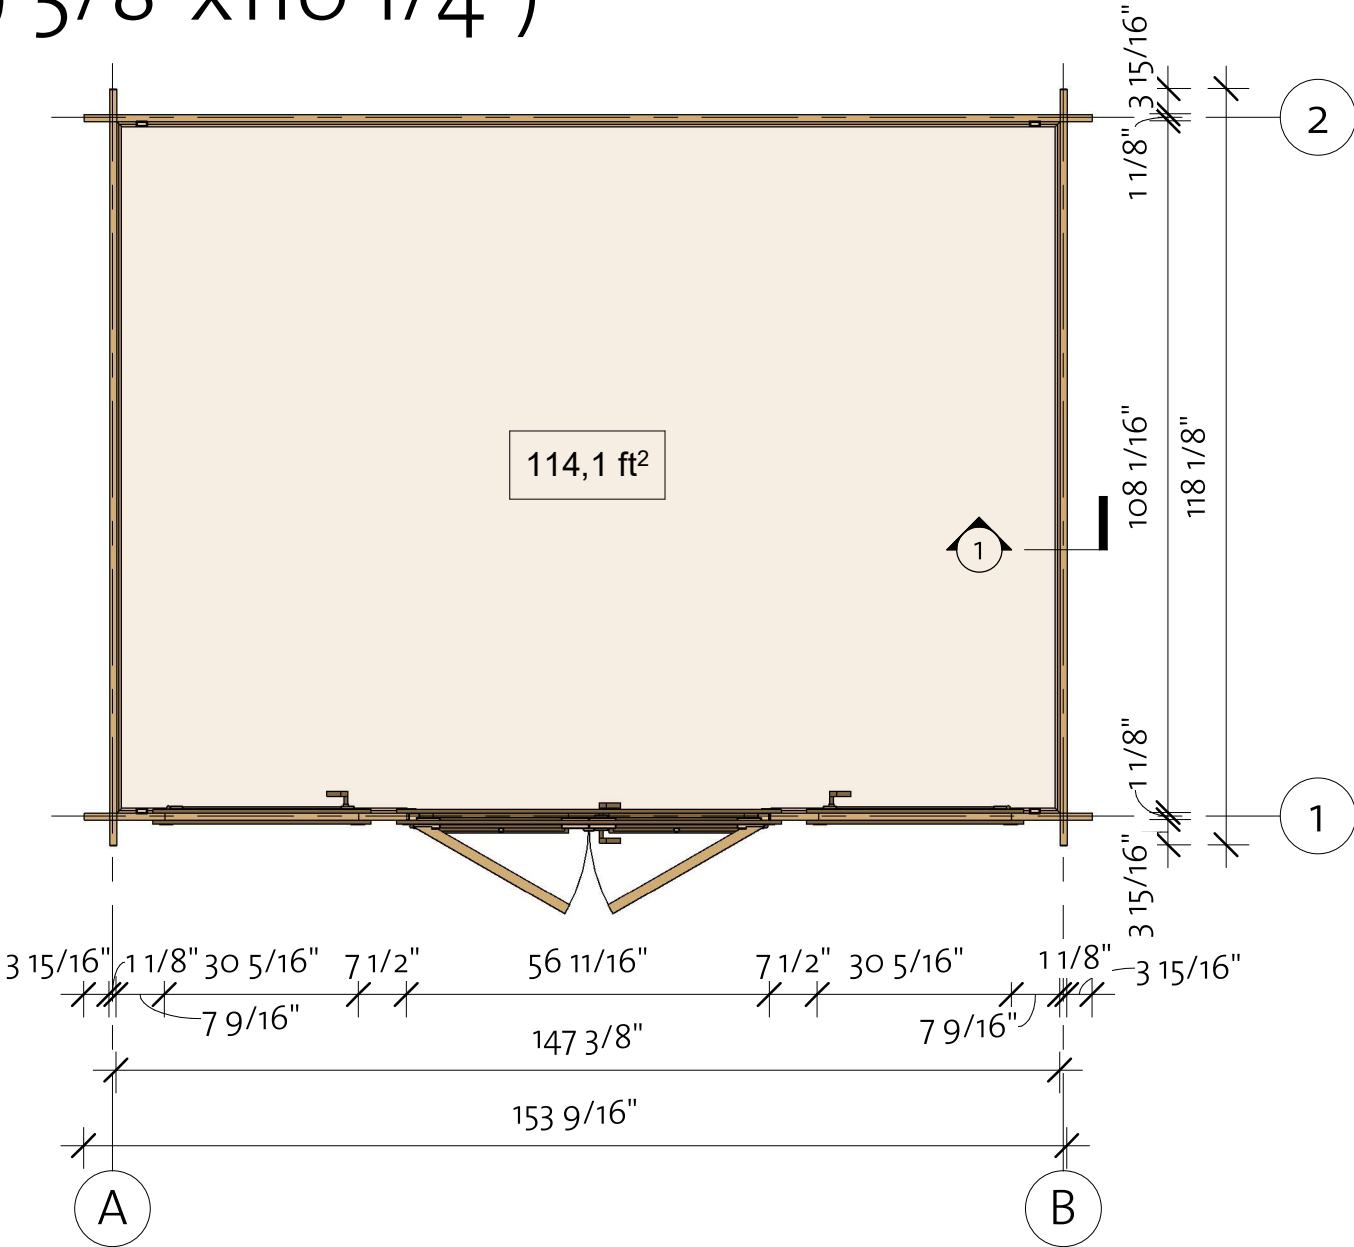

Toronto 1 1/8" (149 5/8"x110 1/4")

Wall 1

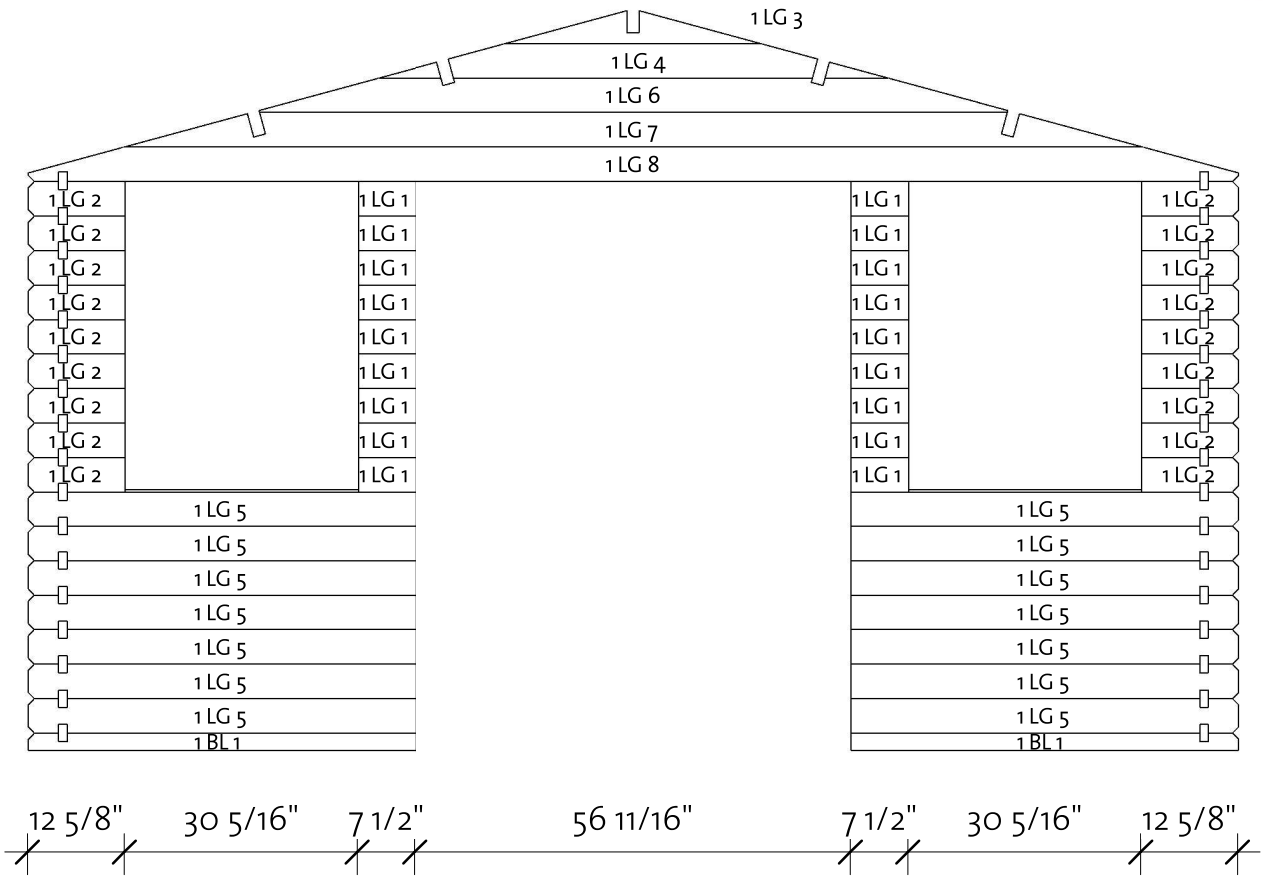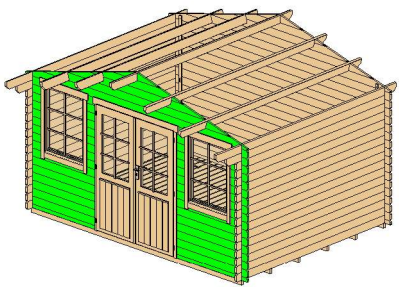

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	28x57	2	50 3/8"
1LG 1	28x114	18	7 1/2"
1LG 2	28x114	18	12 5/8"
1LG 3 *	28x114	1	33 1/8"
1LG 4 *	28x114	1	66 1/4"
1LG 5	28x114	14	50 3/8"
1LG 6 *	28x114	1	97 1/2"
1LG 7 *	28x114	1	132 9/16"
1LG 8 *	28x114	1	157 1/2"



*Gable-delivered premounted

Log Profile Wall 1	
Profile	Profile

28x57	
28x114	

Toronto 1 1/8" (149 5/8"x110 1/4")

Wall 2

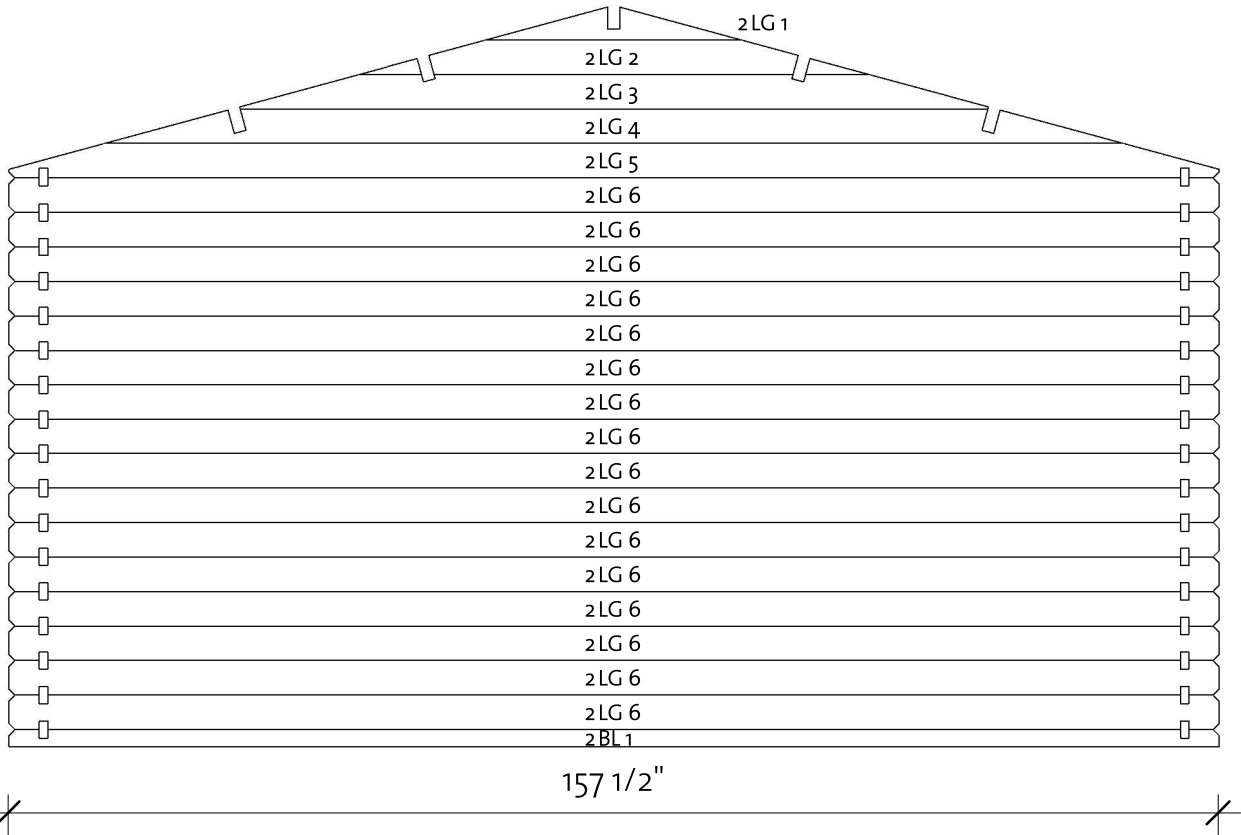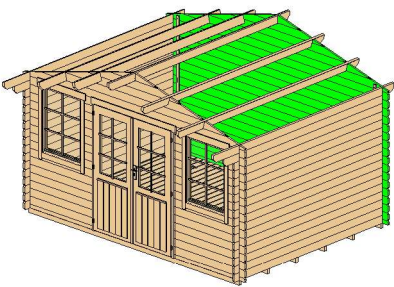

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	28x114	1	157 1/2"
2LG 1 *	28x114	1	33 1/8"
2LG 2 *	28x114	1	66 1/4"
2LG 3 *	28x114	1	97 1/2"
2LG 4 *	28x114	1	132 9/16"
2LG 5 *	28x114	1	157 1/2"
2LG 6	28x114	16	157 1/2"


*Gable-delivered premounted

Log Profile Wall 2	
Profile	Profile

28x57	
28x114	


Toronto 1 1/8" (149 5/8"x110 1/4")

Wall A

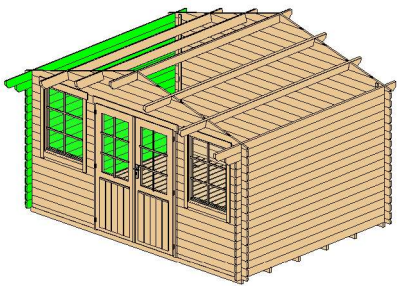

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	28x114	15	118 1/8"
ALG 2	28x114	1	126"
ATL 1	28x120	1	137 13/16"

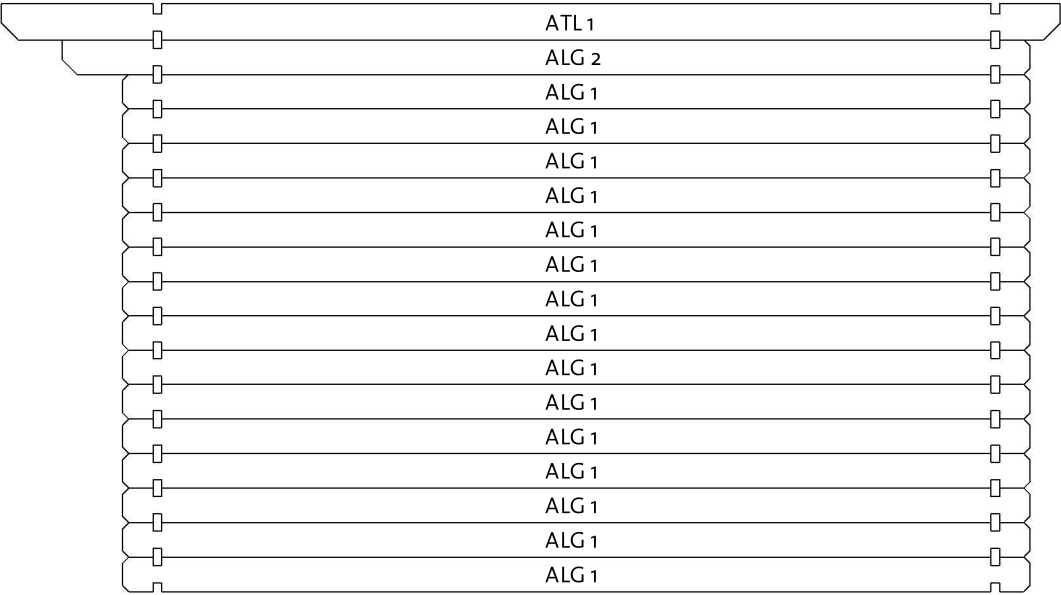


7 7/8" 7 7/8" 118 1/8" 3 15/16"

Log Profile Wall A	
Profile	Profile

28x114	
28x120	

Toronto 1 1/8" (149 5/8"x110 1/4")

Wall B

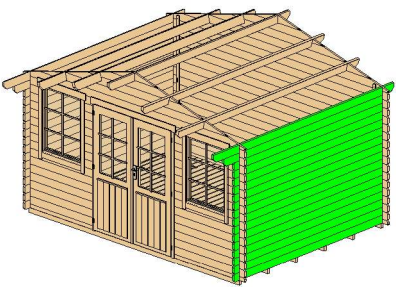


Wall B			
Mark	Profile	Count	Cut Length

BLG 1	28x114	15	118 1/8"
BLG 2	28x114	1	126"
BTL 1	28x120	1	137 13/16"


Log Profile Wall B	
Profile	Profile

28x114	
28x120	

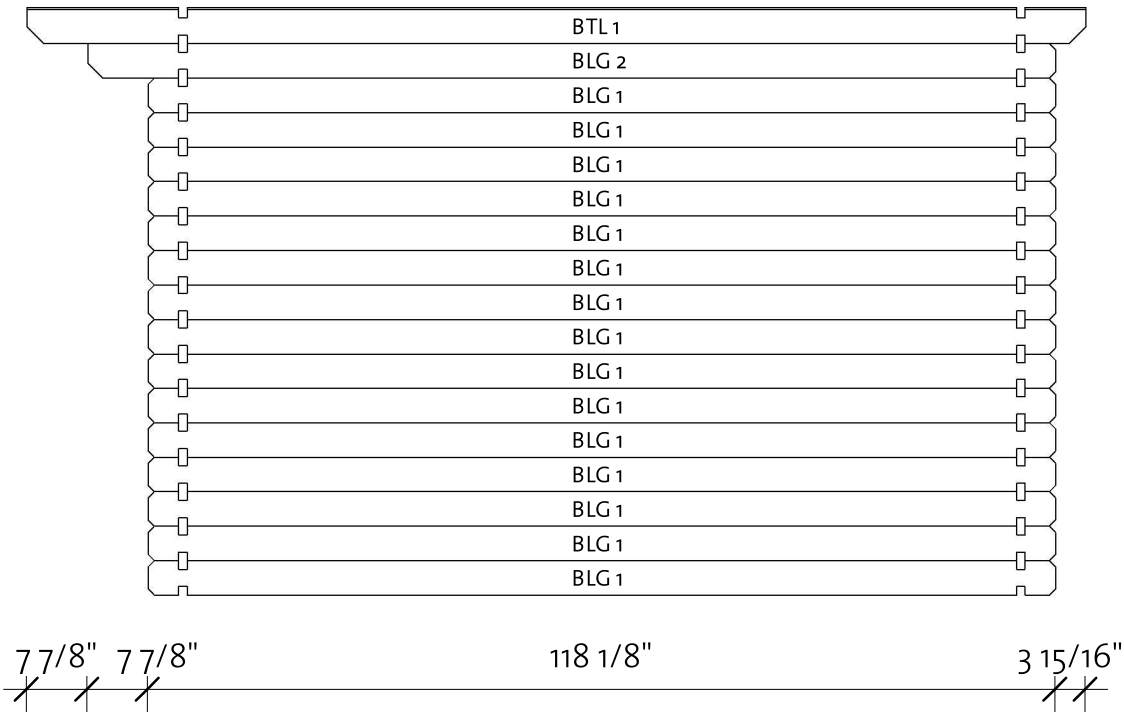

Toronto 1 1/8" (149 5/8"x110 1/4")




Roof 1

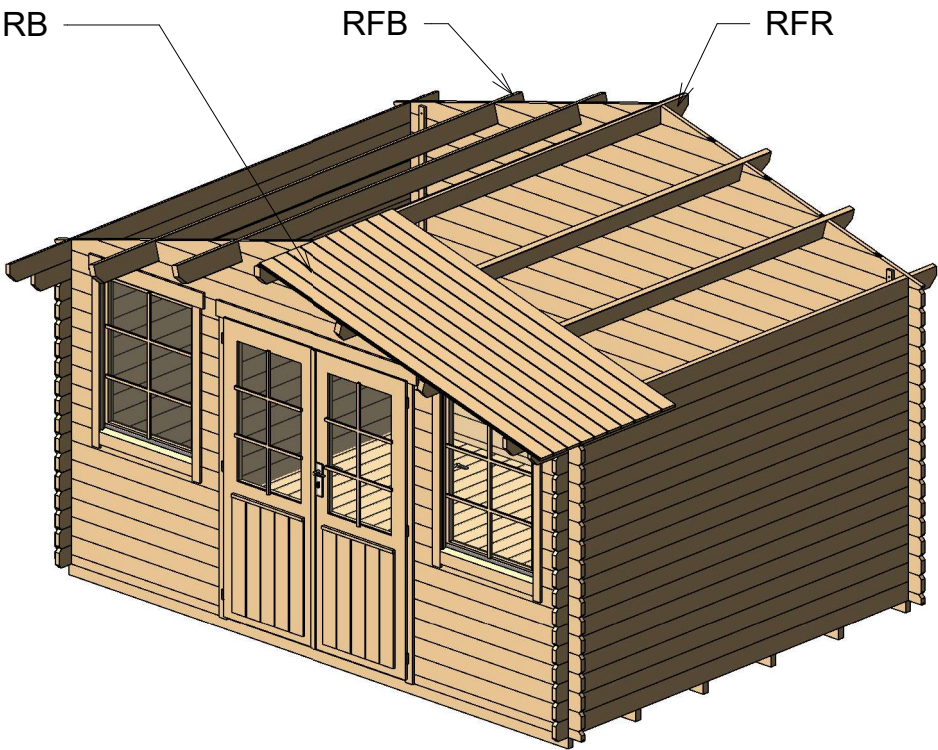


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x120		1	137 13/16"
RFB	Beam 40x120		4	137 13/16"
RB	18x110		66	87 3/8"

Toronto 1 1/8" (149 5/8"x110 1/4")

Roof 2

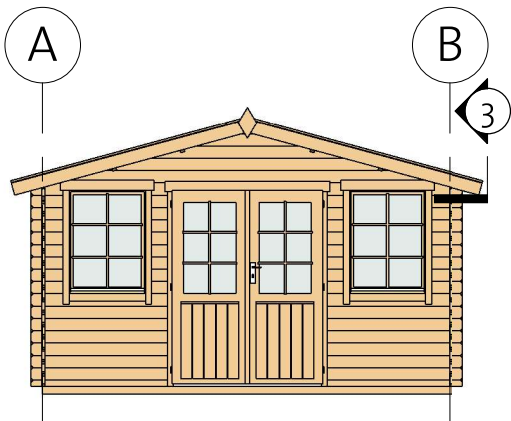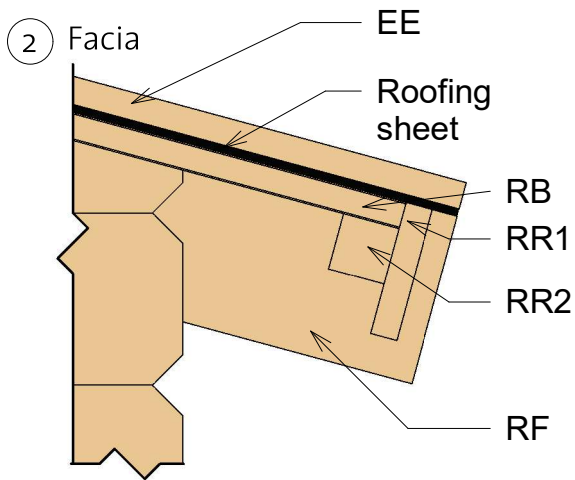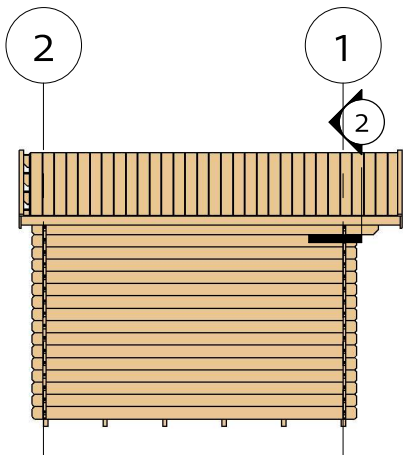

3 Roof Reinforcement

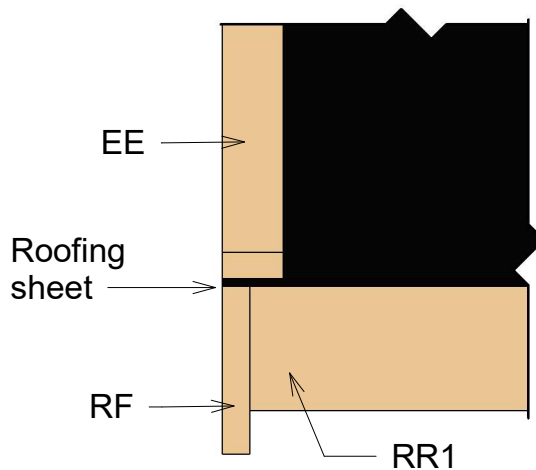


Fascia Schedule


Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	89"
RF	Roof Fascia 18x115		4	89"
RR1	Roof reinforcement 18x90		2	137 13/16"
RR2	Roof reinforcement 38x38		2	137 13/16"

Toronto 1 1/8" (149 5/8"x110 1/4")

Extras

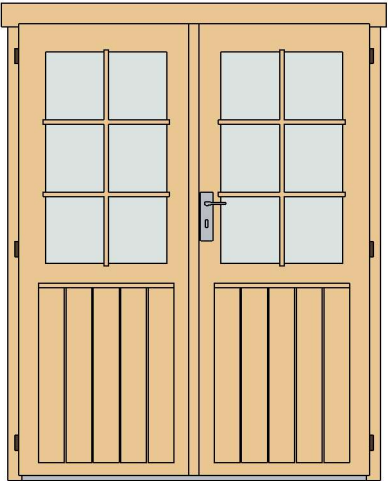

Door Schedule				
Model	Type	Width	Height	Count
BDD5R	Basic double door 5 right	56 1/8"	72 1/4"	1
DCB6	Door crossbar 6	--	--	2



Window Schedule				
Model	Type	Width	Height	Count
CW1R	Basic window 1 right	30 1/8"	39"	1
CW1L	Basic window 1 left	30 1/8"	39"	1
WCB6	Window crossbar 6	--	--	2

Fasteners/Extras		
Name	Type	Count

Hitblock	11 13/16"-15 3/4"	
Bolts	M5/16" x 2 3/8"	12
Screws	3/16" x 2 3/4"	15
nails	1/16" x 1 9/16"	30
Screws	1/4" x 5 1/2"	35
Screws	3/16" x 1 9/16"	60
Screws	3/16" x 2"	510

Type	Count	Lenght
Windboard 18x40	4	86 5/8"

Family	Count
Romb	2

Toronto 1 1/8" (149 5/8"x110 1/4")

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB	IFB 40x70		6	149 3/16"
-----	--------------	---	---	--------------

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 18x110		35	107 7/8"
BB1	BB 20x40		2	3800
BB2	BB 20x40		2	2800

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x120		1	137 13/16"
RFB	Beam 40x120		4	137 13/16"
RB	18x110		66	87 3/8"

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	89"
RF	Roof Fascia 18x115		4	89"
RR1	Roof reinforcement 18x90		2	137 13/16"
RR2	Roof reinforcement 38x38		2	137 13/16"

Toronto 1 1/8" (149 5/8"x110 1/4")

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	28x57	2	50 3/8"
1LG 1	28x114	18	7 1/2"
1LG 2	28x114	18	12 5/8"
1LG 3 *	28x114	1	33 1/8"
1LG 4 *	28x114	1	66 1/4"
1LG 5	28x114	14	50 3/8"
1LG 6 *	28x114	1	97 1/2"
1LG 7 *	28x114	1	132 9/16"
1LG 8 *	28x114	1	157 1/2"

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	28x114	1	157 1/2"
2LG*1	28x114	1	33 1/8"
2LG*2	28x114	1	66 1/4"
2LG*3	28x114	1	97 1/2"
2LG*4	28x114	1	132 9/16"
2LG*5	28x114	1	157 1/2"
2LG 6	28x114	16	157 1/2"

*Gable-delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	28x114	15	118 1/8"
ALG 2	28x114	1	126"
ATL 1	28x120	1	137 13/16"

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	28x114	15	118 1/8"
BLG 2	28x114	1	126"
BTL 1	28x120	1	137 13/16"

Log Profiles	
Profile	Profile

28x57	
28x114	
28x120	