Arizona 1 28 (145 5/8"x98 3/8")

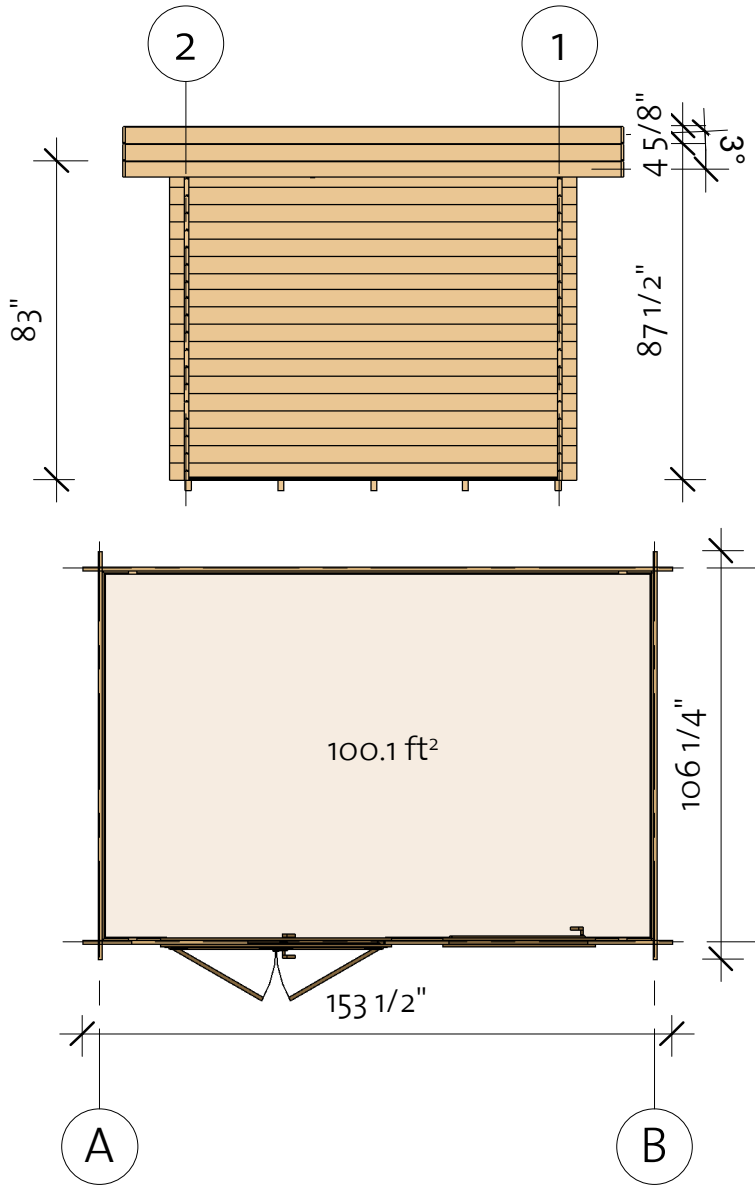

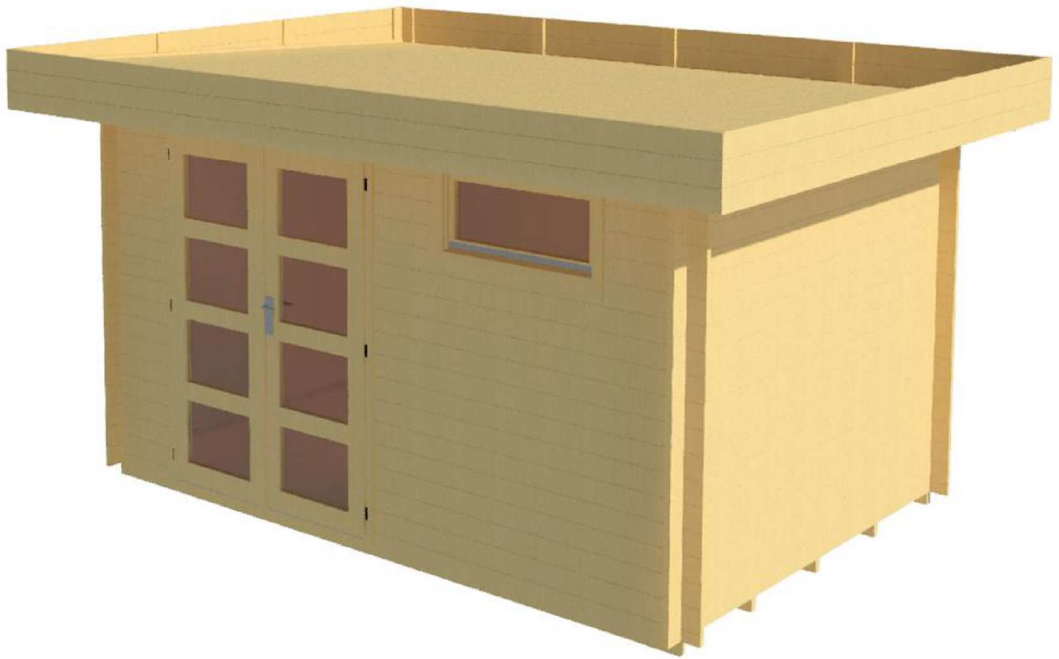

4000010_210521

EZ Log Structures
Do-It-Yourself Building Kits

Arizona 1 28 (145 5/8"x98 3/8")

Foundation

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		5	145 1/4"

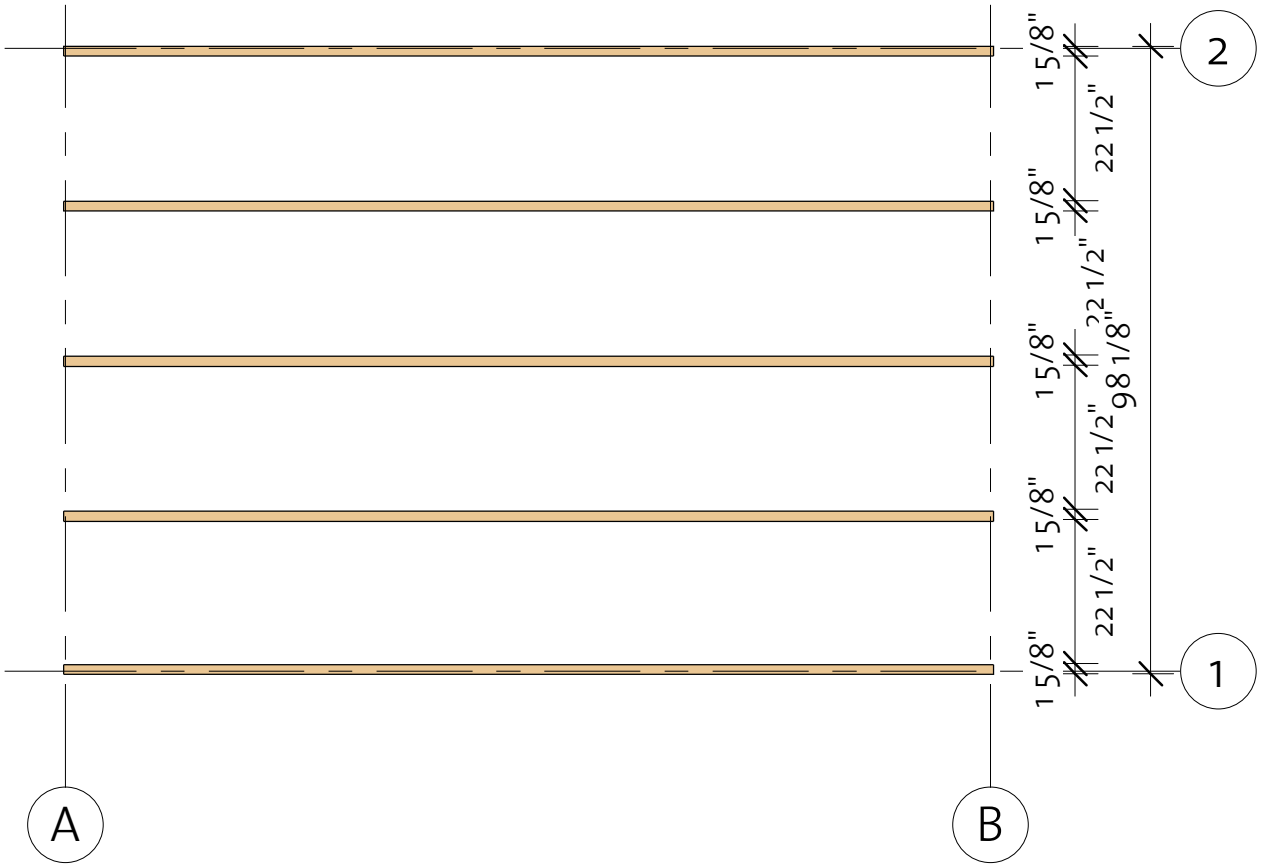

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Floor Plan
(I) Baseboard

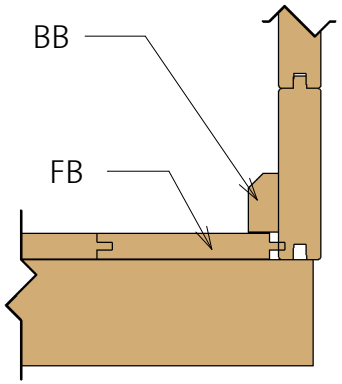

Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		33	96 1/8"
BB1	BB 20x40		2	98 3/8"
BB2	BB 20x40		2	145 5/8"

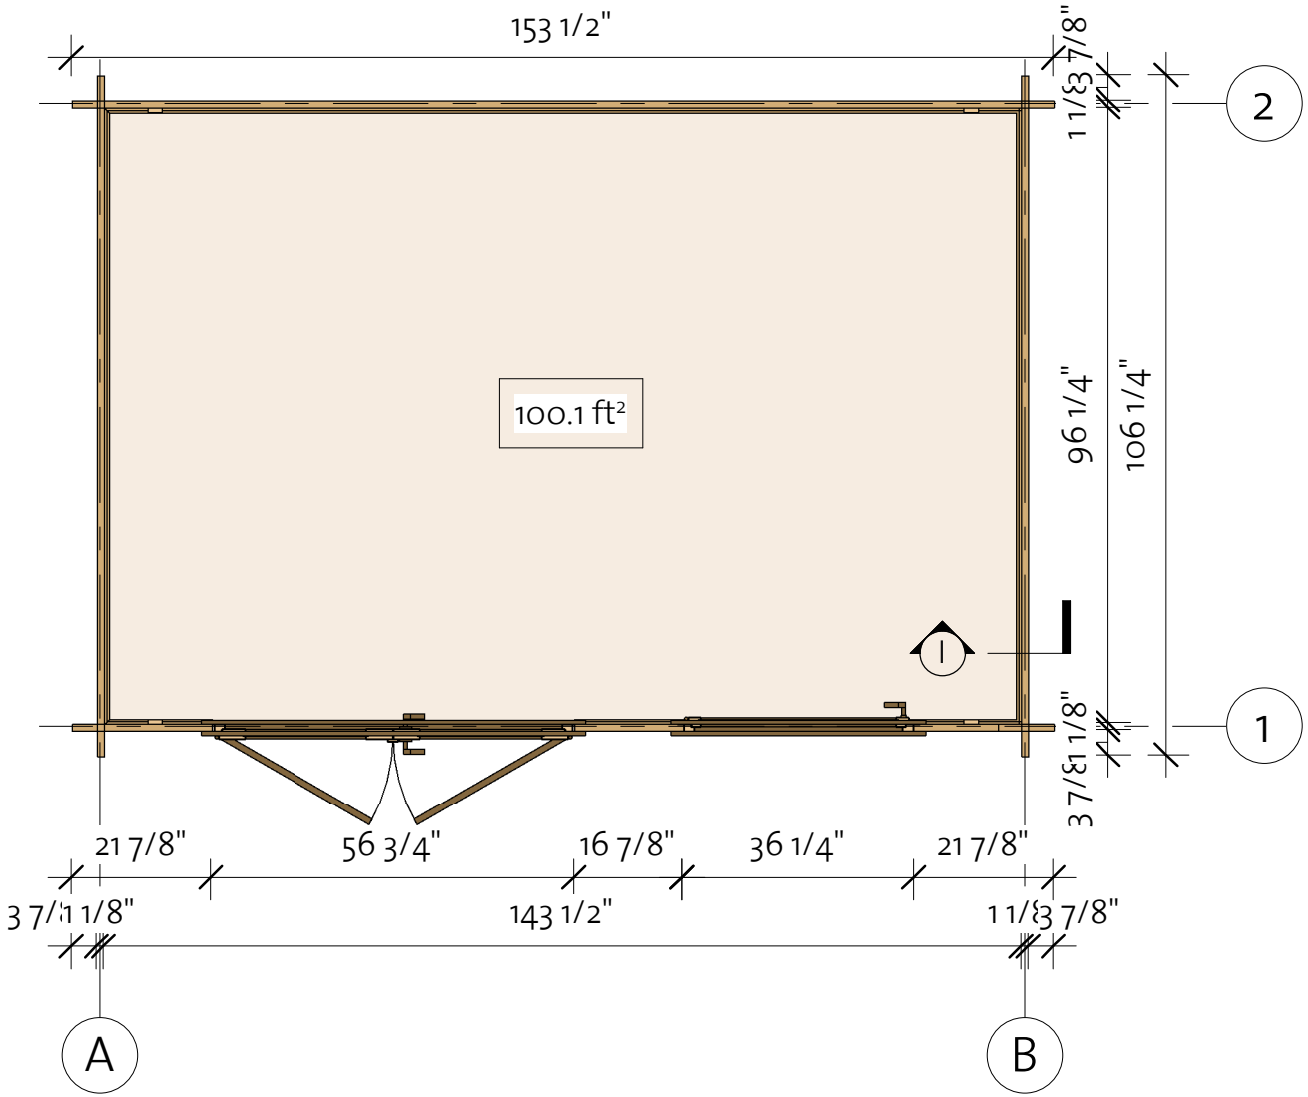

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Wall 1

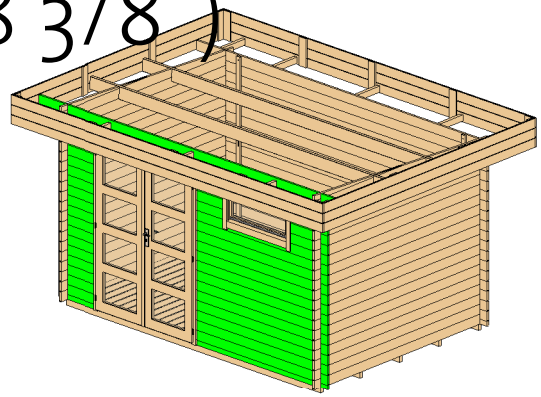

Wall 1			
Mark	Profile	Count	Cut Length
1BL 1	28x57	1	21 7/8"
1BL 2	28x57	1	75"
1LG 1	28x114	4	16 7/8"
1LG 2	28x114	21	21 7/8"
1LG 3	28x114	13	75"
1LG 4	28x114	1	153 1/2"
1TL 1	28x114	1	176 3/8"

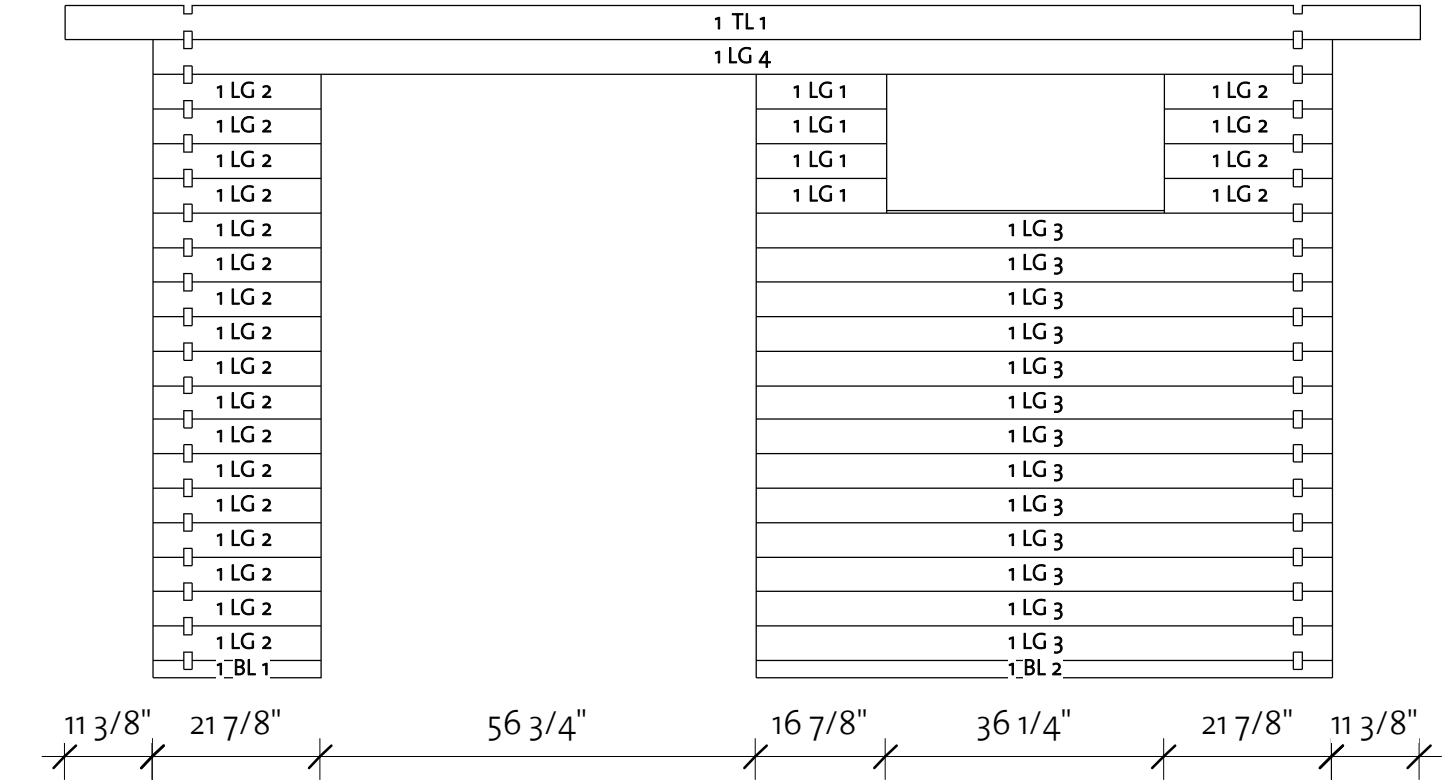

Log Profile Wall 1	
Profile	Profile
28x114	
28x57	
28x114	

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Wall 2

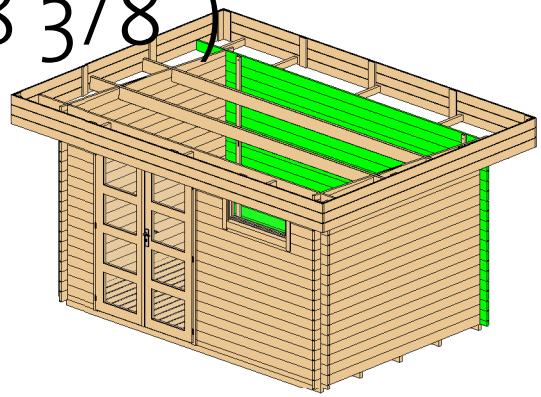

Wall 2			
Mark	Profile	Count	Cut Length
2BL 1	28x57	1	153 1/2"
2LG 1	28x114	17	153 1/2"
2TL 1	28x114	1	176 3/8"

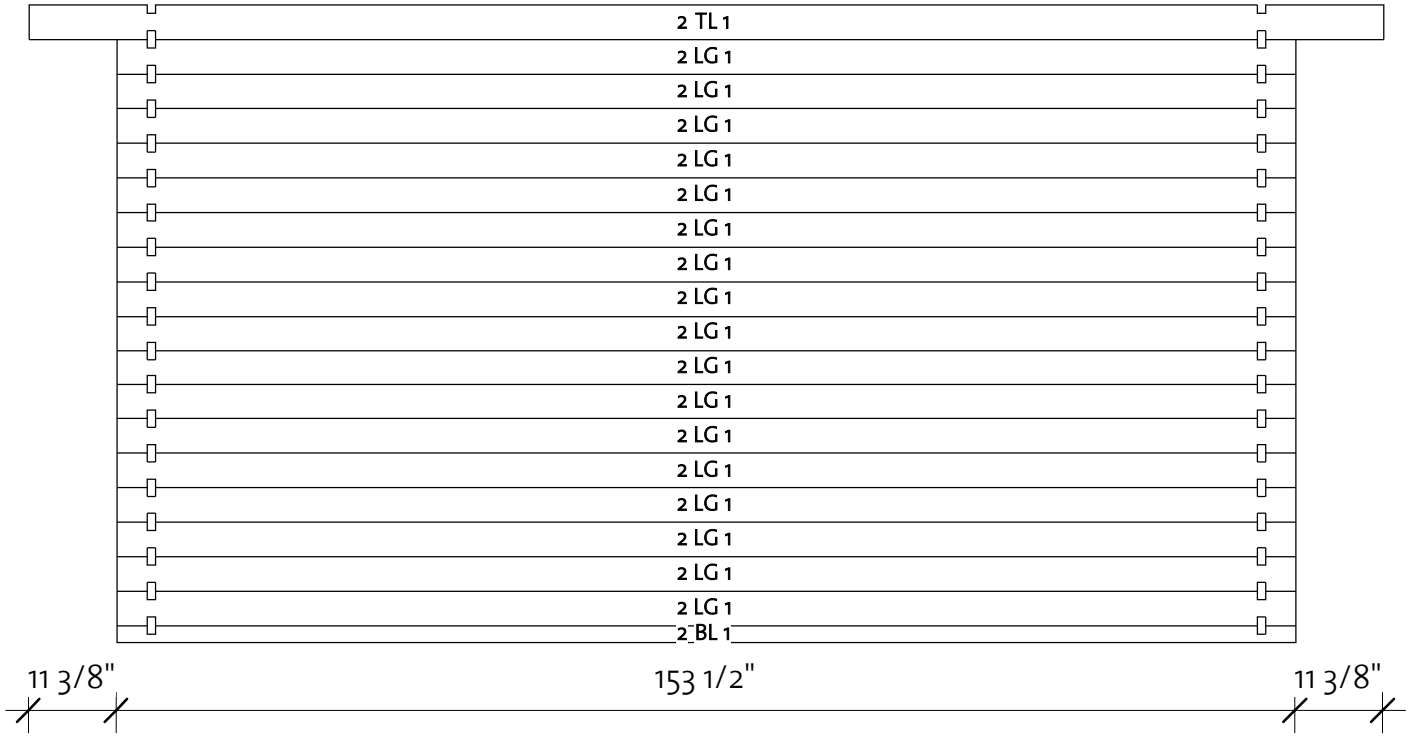

Log Profile Wall 2	
Profile	Profile
28x114	
28x57	
28x114	

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Wall A

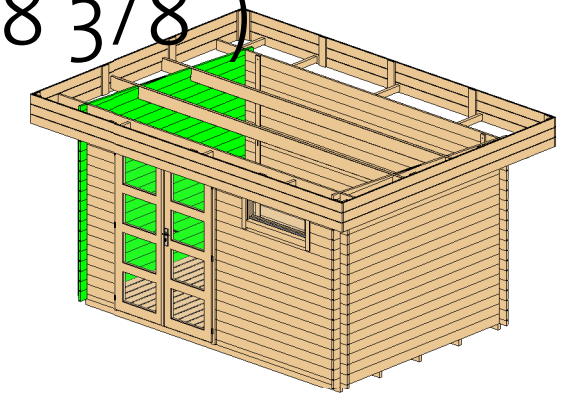

Wall A			
Mark	Profile	Count	Cut Length
ALG 1 *	28x114	1	53 3/4"
ALG 2 *	28x114	1	106 1/4"
ALG 3	28x114	17	106 1/4"
ALG 4*	28x114	1	106 1/4"

* Gable - delivered premounted

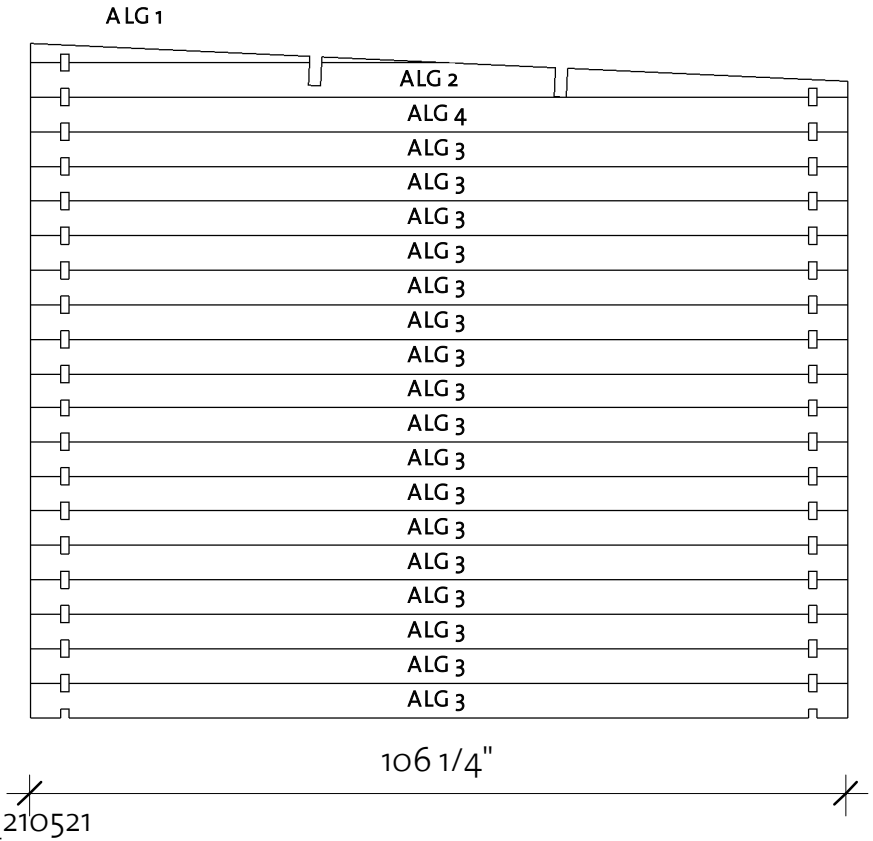

Log Profile Wall A	
Profile	Profile
28x114	
28x114	

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Wall B

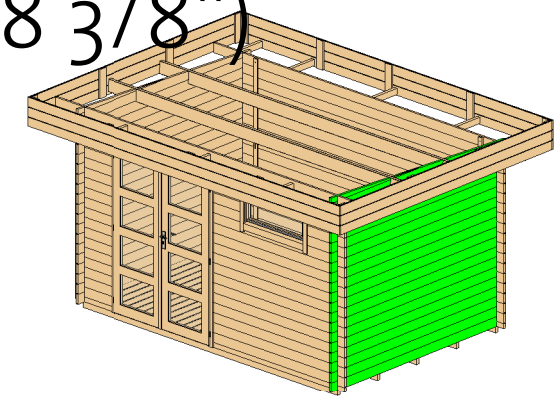

Wall B			
Mark	Profile	Count	Cut Length
BLG 1 *	28x114	1	53 3/4"
BLG 2 *	28x114	1	106 1/4"
BLG 3	28x114	17	106 1/4"
BLG 4 *	28x114	1	106 1/4"

* Gable - delivered premounted

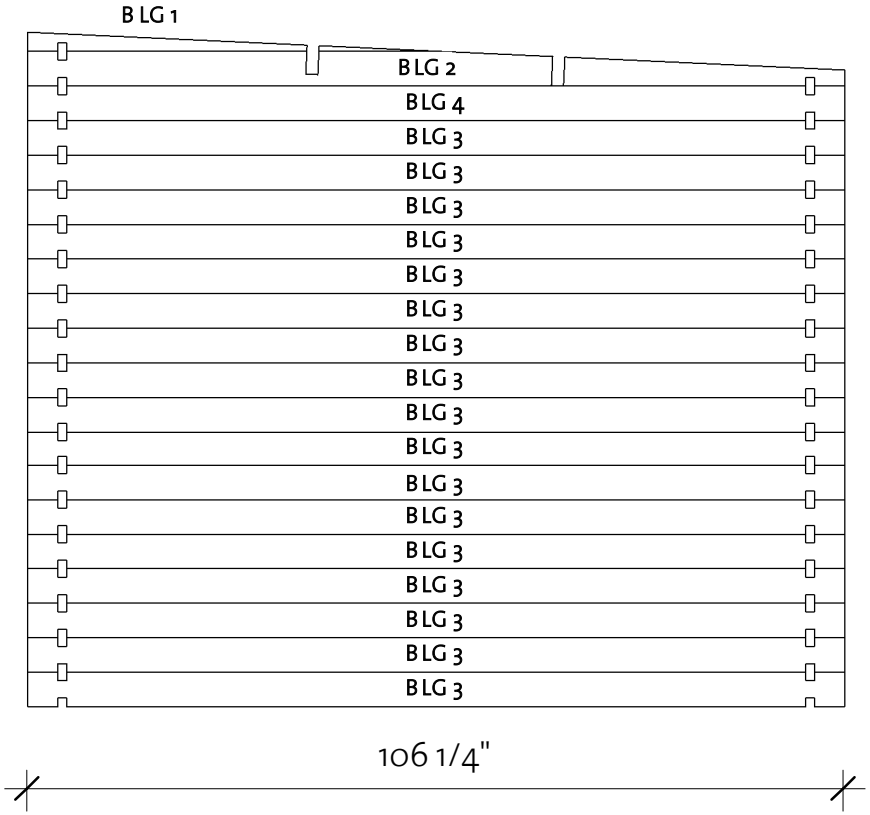

Log Profile Wall B	
Profile	Profile
28x114	

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Roof 1

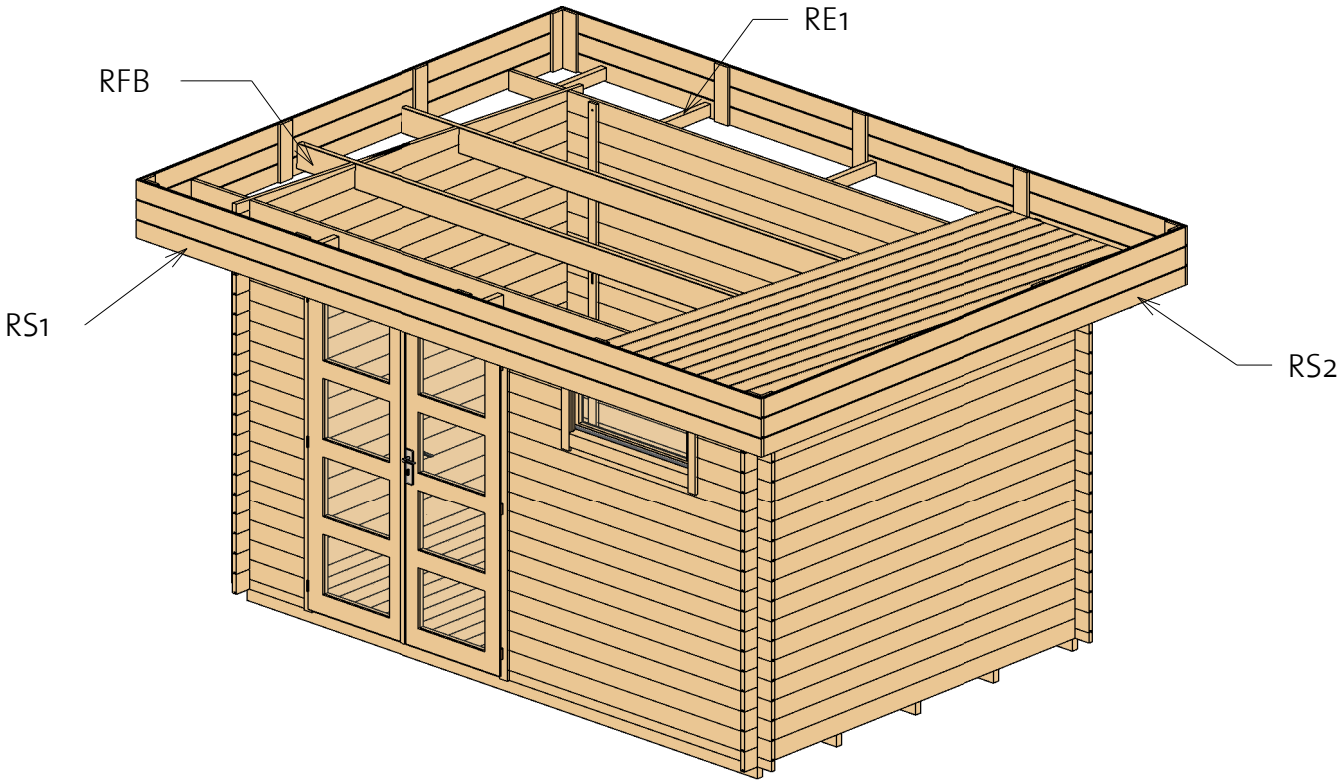

Roof				
Mark	Type	Profile	Count	Length
RB	17x114		40	127 1/8"
RE1	40x70		8	15 3/8"
RFB	Beam 40x143		2	176 3/8"

Roof Side Schedule		
Type	Length	Count
RS1	177 3/4"	2
RS2	129 1/8"	2

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Roof 2

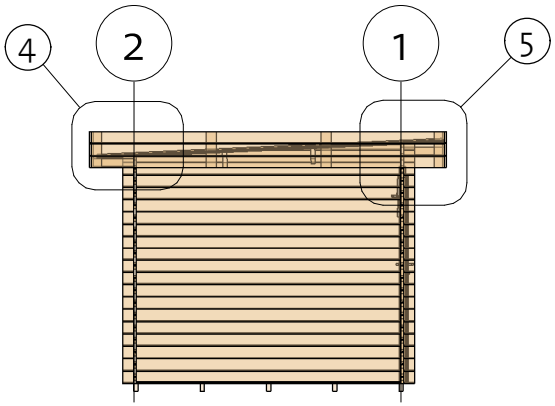

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		1	175"
EE2	Eave Edging 18x40		2	124 7/8"

4 Roof - Callout Back

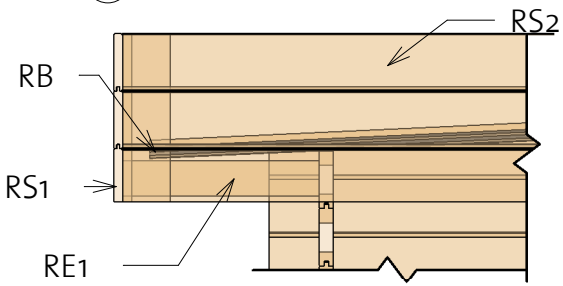

5 Roof - Callout Front

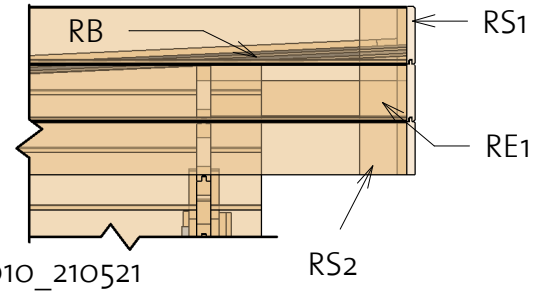

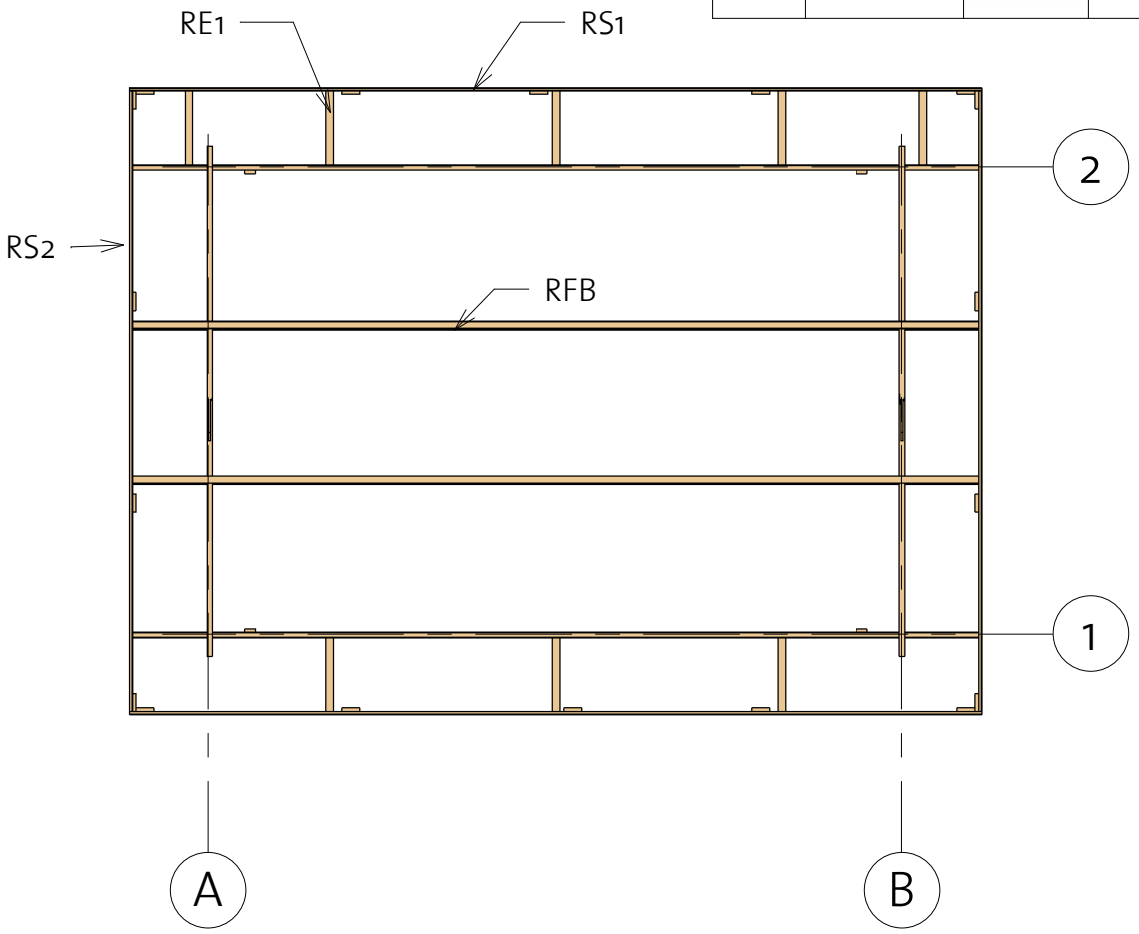

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

Extras

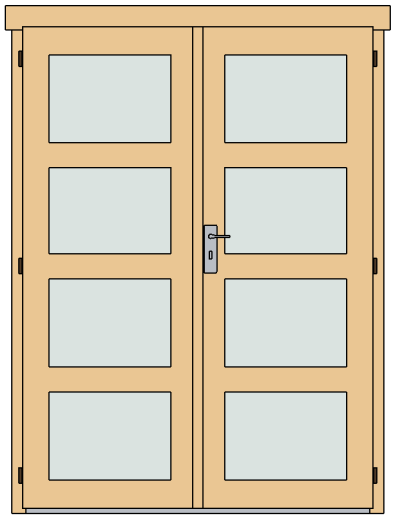

Door Schedule				
Model	Type	Width	Height	Count
BDD4R	Basic double door 4, four glass right	56 1/8"	77"	1



Window Schedule				
Model	Type	Width	Height	Count
BW2R	Basic window 2 right	36"	16 1/2"	1
WCB6	Window crossbar 6 optional	--	--	1

Fasteners & Extras		
Name	Comments	Count
Hitblock	300-400 mm	
Bolts	M8 x 60	12
Screws	5,0 x 70	25
Nails	1,4 x 40	30
Screws	6,0 x 140	80
Screws	4,0x40	400

Type	Count	Length
Windboard 18x40	4	86 5/8"

4000010_210521

Arizona 1 28 (145 5/8"x98 3/8")

List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		5	145 1/4"

Roof				
Mark	Type	Profile	Count	Length
RB	17x114		40	127 1/8"
RE1	40x70		8	15 3/8"
RFB	Beam 40x143		2	176 3/8"

Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		33	96 1/8"
BB1	BB 20x40		2	98 3/8"
BB2	BB 20x40		2	145 5/8"

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		1	175"
EE2	Eave Edging 18x40		2	124 7/8"

Roof Side Schedule		
Type	Length	Count
RS1	177 3/4"	2
RS2	129 1/8"	2

Arizona 1 28 (145 5/8"x98 3/8")

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length
1BL 1	28x57	1	21 7/8"
1BL 2	28x57	1	75"
1LG 1	28x114	4	16 7/8"
1LG 2	28x114	21	21 7/8"
1LG 3	28x114	13	75"
1LG 4	28x114	1	153 1/2"
1TL 1	28x114	1	176 3/8"

Wall 2			
Mark	Profile	Count	Cut Length
2BL 1	28x57	1	153 1/2"
2LG 1	28x114	17	153 1/2"
2TL 1	28x114	1	176 3/8"

Wall A			
Mark	Profile	Count	Cut Length
ALG 1 *	28x114	1	53 3/4"
ALG 2 *	28x114	1	106 1/4"
ALG 3	28x114	17	106 1/4"
ALG 4 *	28x114	1	106 1/4"

Wall B			
Mark	Profile	Count	Cut Length
BLG 1 *	28x114	1	53 3/4"
BLG 2 *	28x114	1	106 1/4"
BLG 3	28x114	17	106 1/4"
BLG 4 *	28x114	1	106 1/4"

* Gable - delivered premounted

Log Profiles	
Profile	Profile
28x114	
28x57	
28x114