
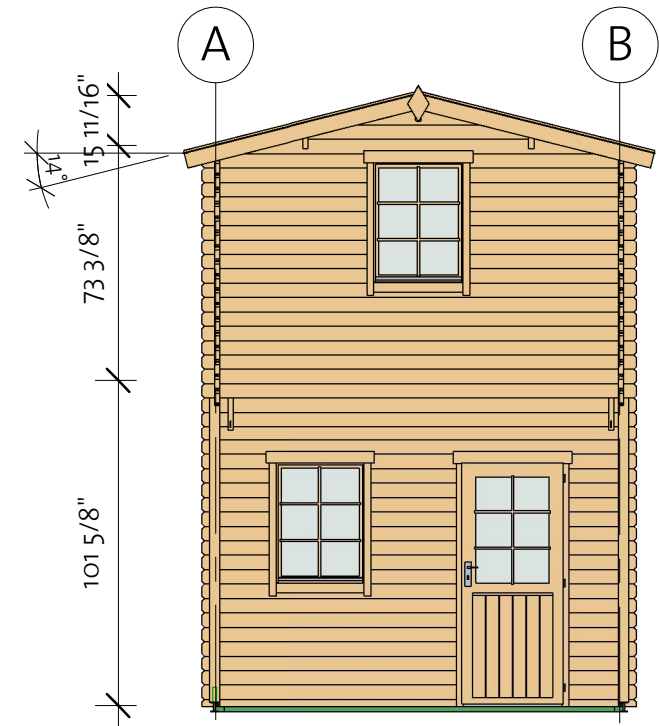



Highland Bunkie 1 9/16" (127 15/16" x 115 3/4")

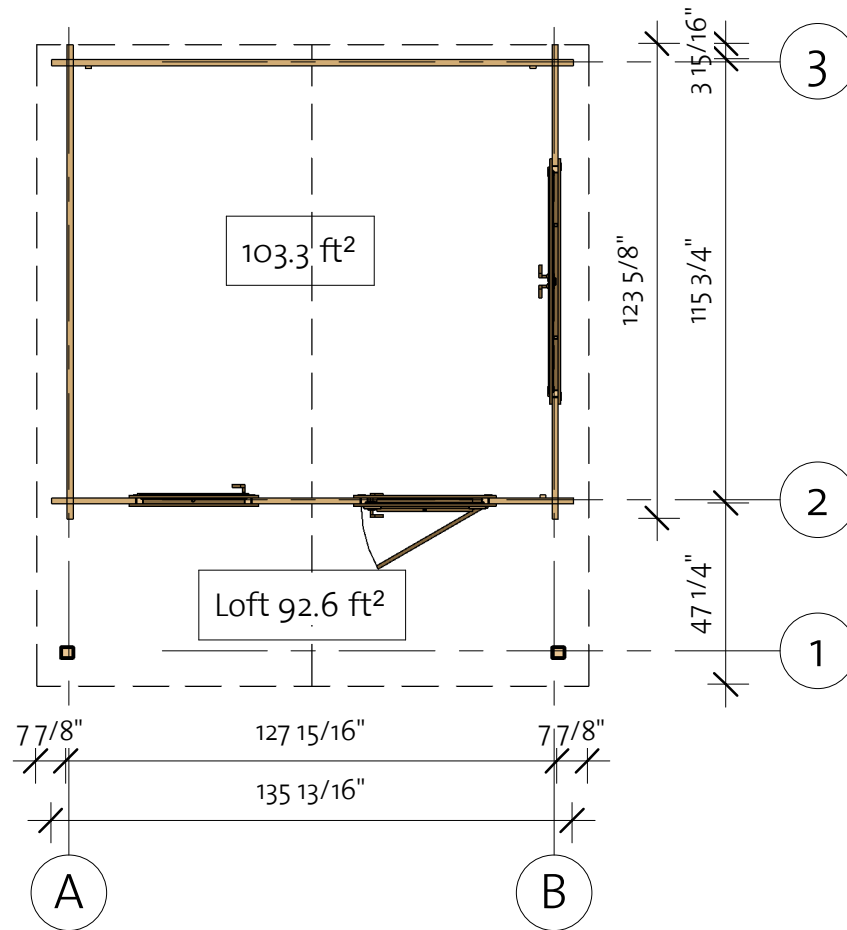


Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

Foundation



Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB1	IFB 70x40		2	115 3/8"
IFB2	IFB 70x40		7	122 1/16"

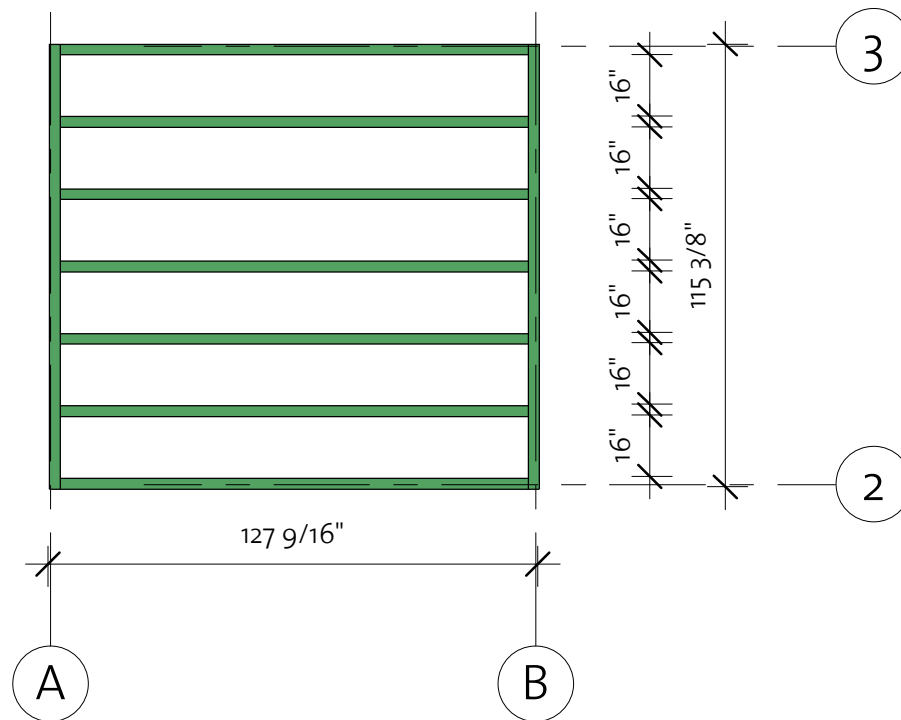

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

Wall 1

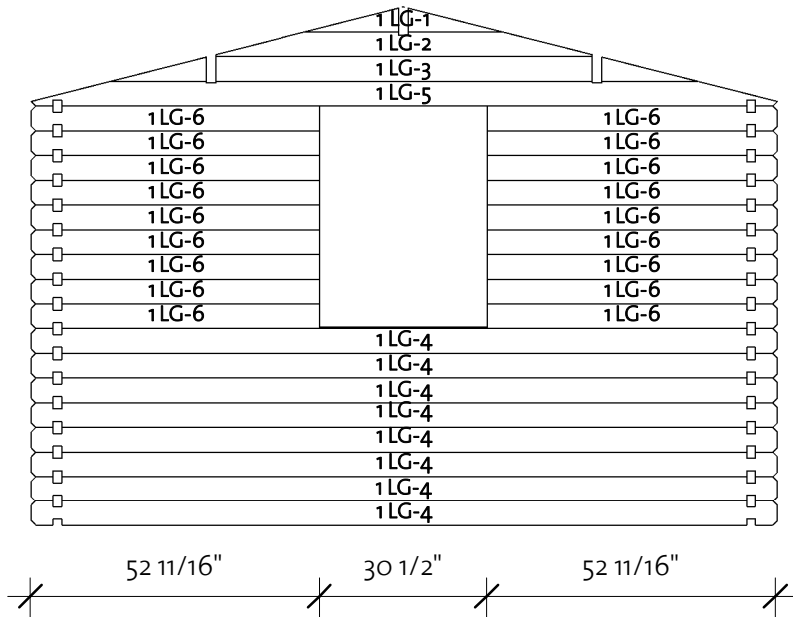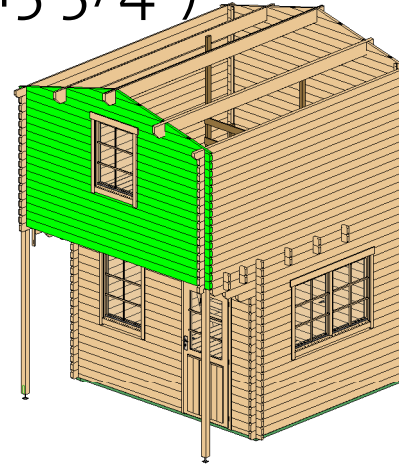

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	35 15/16"
1LG-2 *	40X114	1	68 5/8"
1LG-3 *	40X114	1	107 1/16"
1LG-4	40X114	8	135 13/16"
1LG-5 *	40X114	1	135 13/16"
1LG-6	40X114	18	52 11/16"


* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40X114	
--------	--



Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

Wall 2

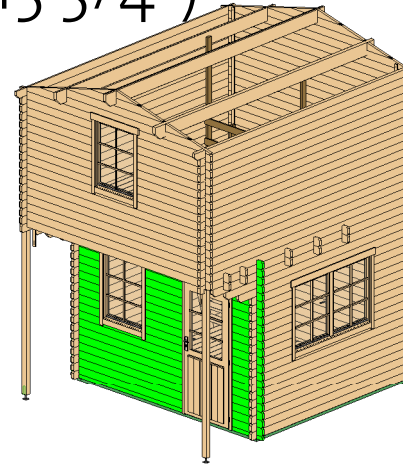

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	21 7/8"
2BL-2	40X57	1	80 1/2"
2LG-1	40X114	26	21 7/8"
2LG-2	40X114	1	135 13/16"
2LG-3	40X114	9	28 1/8"
2LG-4	40X114	8	80 1/2"
2LG-5	40X114	4	135 13/16"


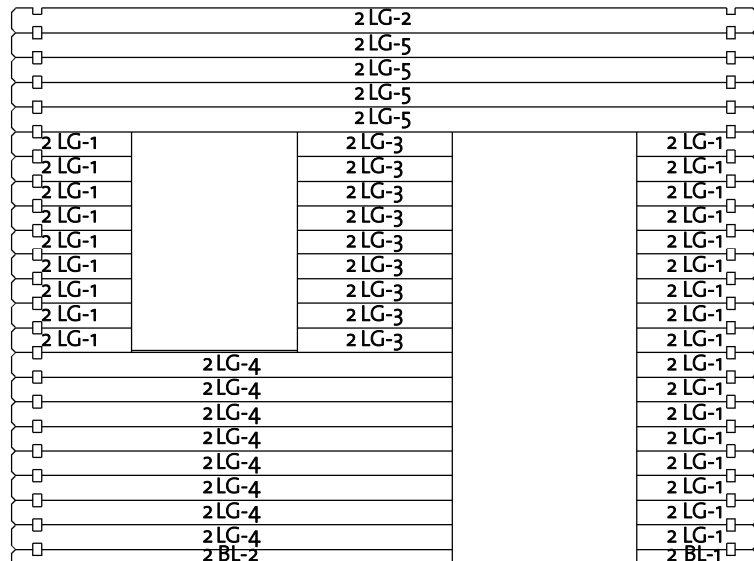


Log Profile Wall 2	
Profile	Profile

40X57	
40X114	
40X114	

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

Wall B

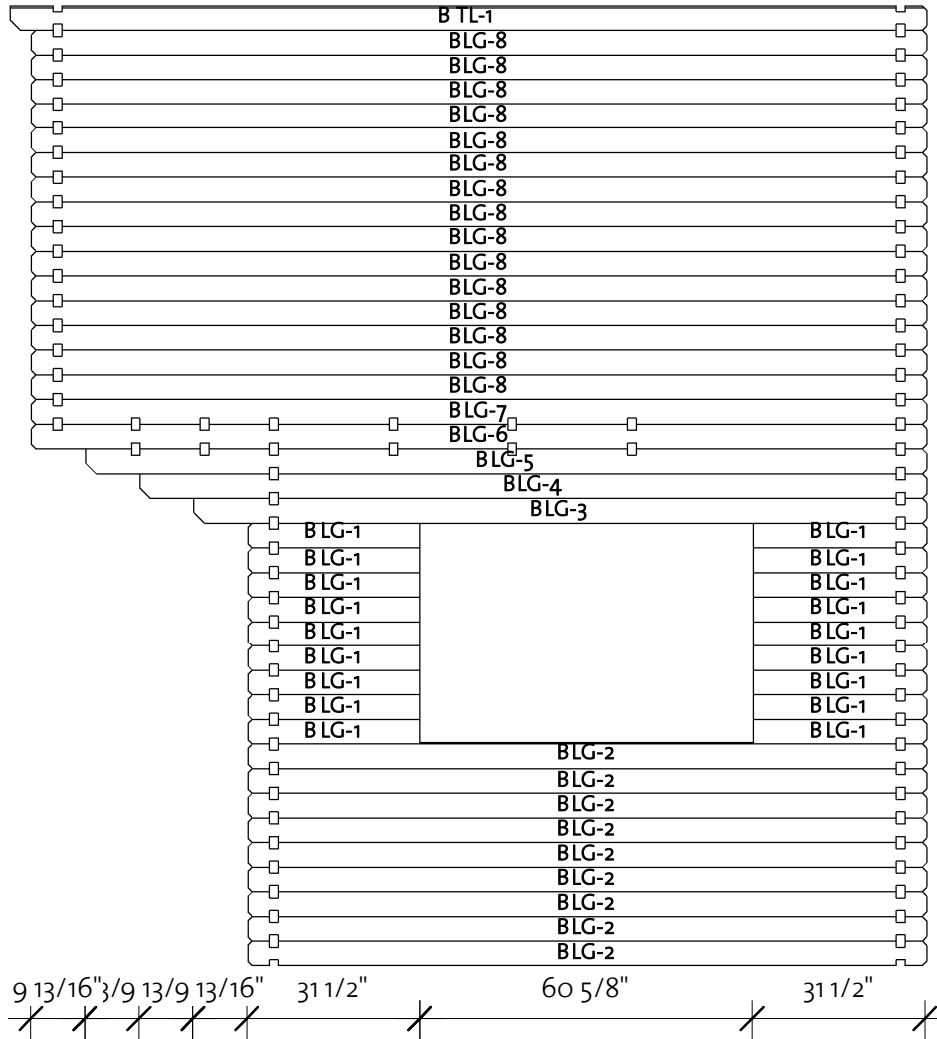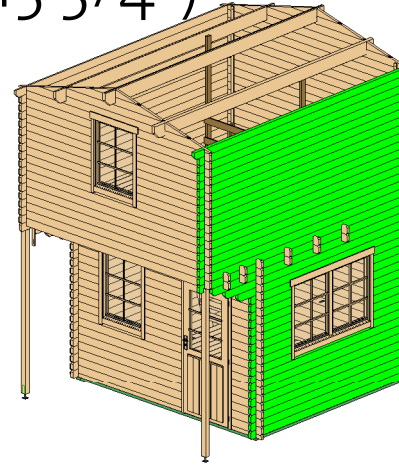

92009303_210107


Wall B			
Mark	Profile	Count	Cut Length
BLG-1	4OX114	18	31 1/2"
BLG-2	4OX114	9	123 5/8"
BLG-3	4OX114	1	133 7/16"
BLG-4	4OX114	1	143 5/16"
BLG-5	4OX114	1	153 1/8"
BLG-6	4OX114	1	163"
BLG-7	4OX114	1	163"
BLG-8	4OX114	15	163"
BTL-1	4OX114	1	166 15/16"





Log Profile Wall B	
Profile	Profile

4OX114	
4OX114	

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

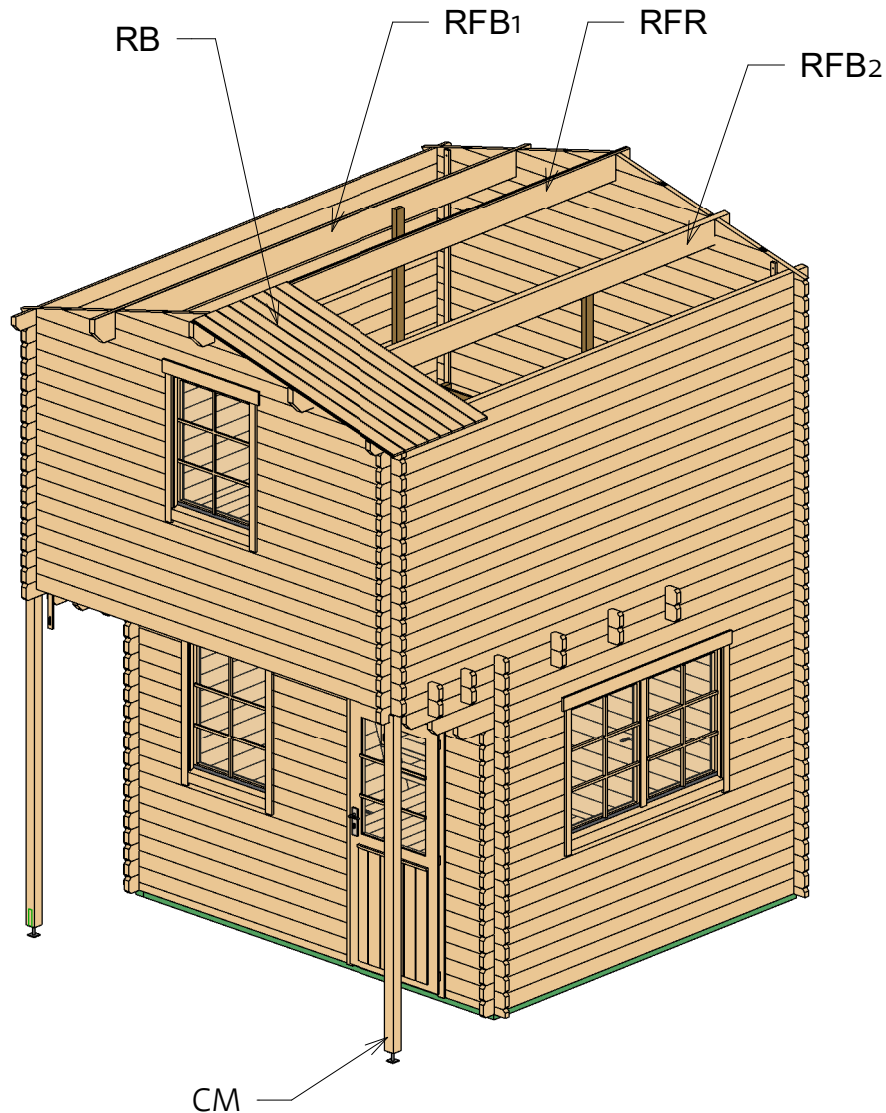Roof 1




Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	166 15/16"
RFB1	Beam 45x195		1	166 15/16"
RFB2	Beam 45x195		1	166 15/16"
RB	17x114		76	73 15/16"



Columns			
Mark	Profile	Count	Length
CM	Post 80x70	2	95 1/8"

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")


Roof 2

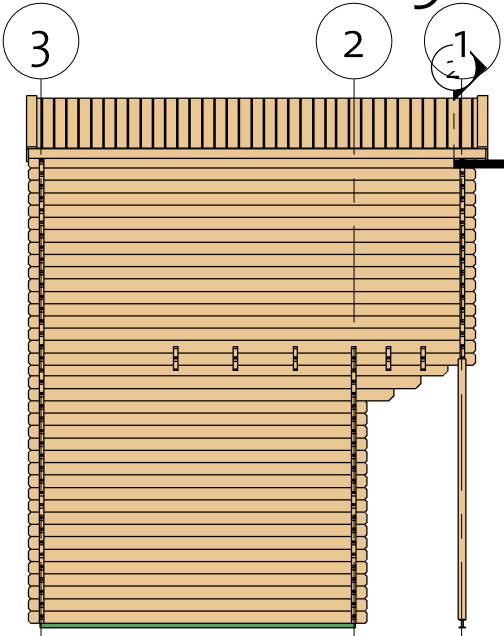

2) Facia

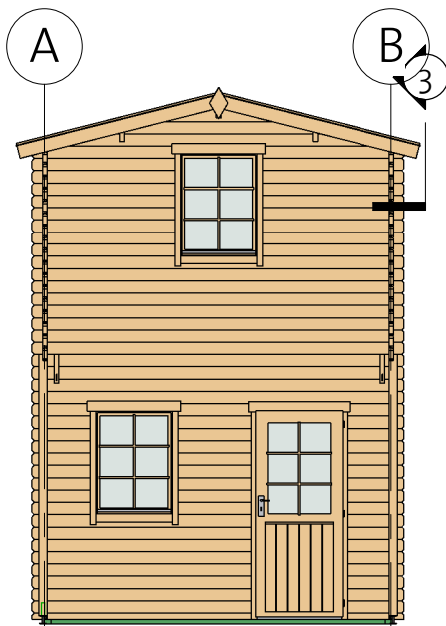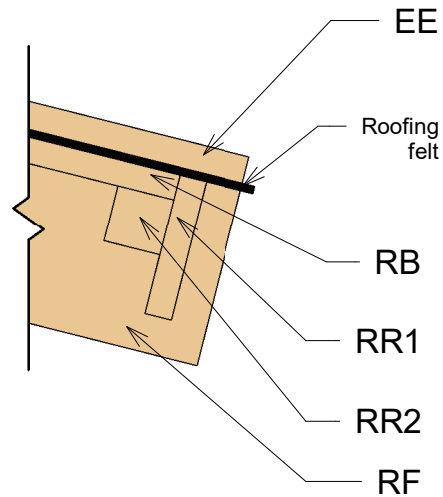

3) Roof Reinforcement

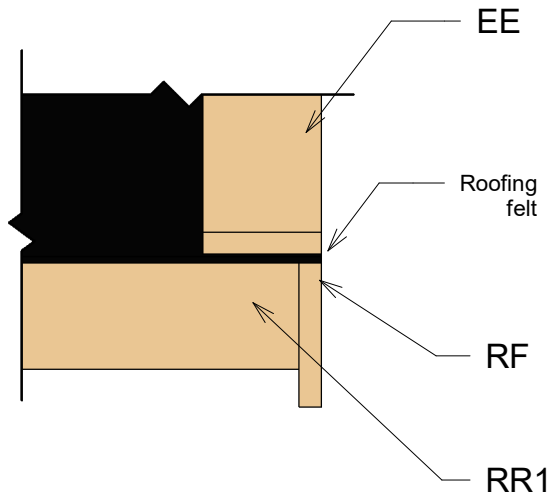




Fascia Schedule


Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	75 3/4"
RF	Roof Fascia 18x120		4	75 3/4"
RR1	Roof reinforce ment 18x95		2	166 15/16"
RR2	Roof reinforce ment 38x38		2	166 15/16"

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

Second floor

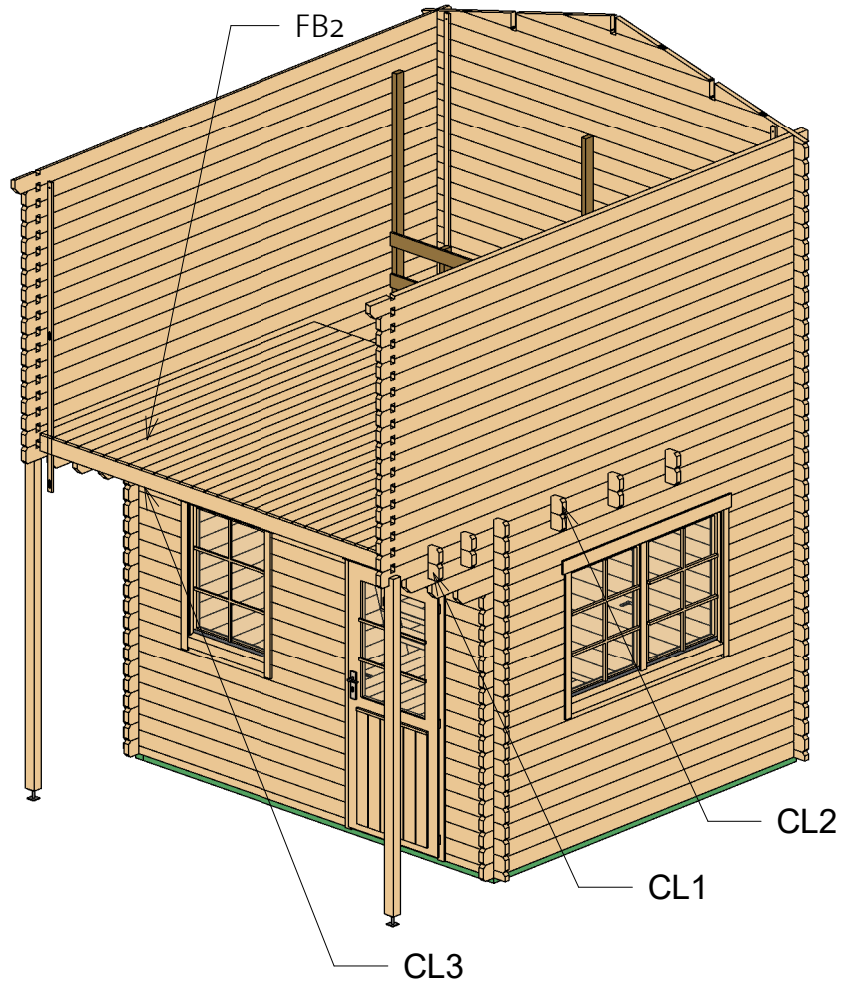


Second floor schedule				
Mark	Type	Profile	Length	Count
CL1	Log 40x114		135 13/16"	5
CL2	Log 40x114		135 13/16"	5
CL3	Log 40x114		124 13/16"	1

Second Floor Schedule				
Mark	Type	Profile	Count	Length
FB2	FB 17x114		29	104 3/4"

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")


Fence

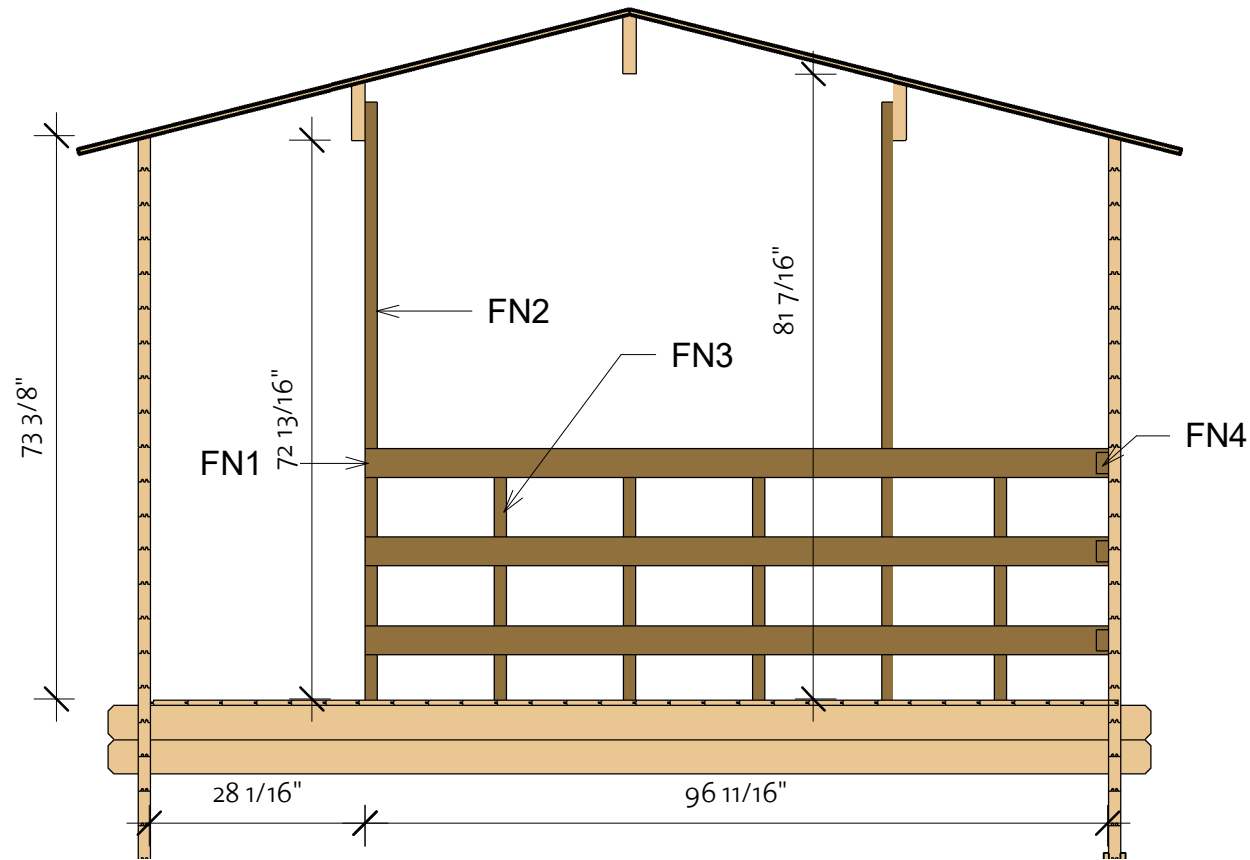

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		96 3/4"	3
FN2	Fence 40x70		87 3/8"	2
FN3	Fence 40x70		42 1/2"	4
FN4	Fence 70x40		3 9/16"	3

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")


Extras

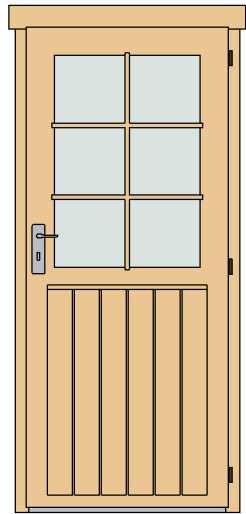

Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	33 1/16"	76 15/16"	1
DCB6	Door Crossbar 6	--	--	2

Type	Count	Length
Windboard 18x40 2200	2	86 5/8"
Windboard 18x40 4400	2	173 1/4"
Windboard 18x40x2500	2	98 7/16"



Type	Count
Romb	2

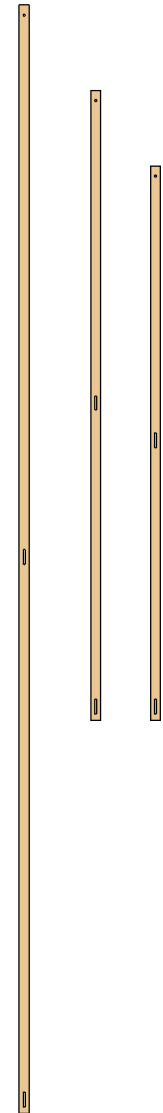

Fasteners/Extras		
Name	Type	Count

Hitblock	11 13/16"-15 3/4"	
Adjustable post foot		2
Ladder fittings		2
Bolts	M5/16" x 2 3/4"	18
Screws	1/4" x 5 1/2"	45
Nails	1/16" x 1 9/16"	55
Screws	3/16" x 2 3/4"	135
Screws	3/16" x 1 9/16"	135
Screws	3/16" x 2"	700


Window Schedule				
Mark	Type	Width	Height	Count
CDW1	Classic double window 1	60 1/4"	39"	1
CW1R	Classic window 1 right	30 1/8"	39"	2
WCB6	Windows Crossbar 6	--	--	4

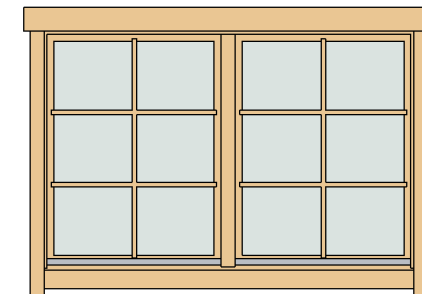





Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB1	IFB 70x40		2	115 3/8"
IFB2	IFB 70x40		7	122 1/16"


Fascia Schedule				
Mark	Type	Profile	Count	Length


EE	Eave Edging 18x95		4	75 3/4"
RF	Roof Fascia 18x120		4	75 3/4"
RR1	Roof reinforce ment 18x95		2	166 15/16"
RR2	Roof reinforce ment 38x38		2	166 15/16"

Columns			
Mark	Profile	Count	Length




CM	Post 80x70	2	95 1/8"
----	------------	---	---------

Floor Schedule				
Mark	Type	Profile	Count	Length

FB1	FB 17x114		29	112 3/8"
-----	-----------	---	----	----------




BB1	BB 20x40		4	114 3/16"
BB2	BB 20x40		3	126"



Roof				
Mark	Type	Profile	Count	Length



RFR	Ridge 45x195		1	166 15/16"
RFB1	Beam 45x195		1	166 15/16"
RFB2	Beam 45x195		1	166 15/16"
RB	17x114		76	73 15/16"


Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

List of all items 2

Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40x120		1	102 3/8"
ST1R	Stair 40x120		1	102 3/8"
ST2	Stair 143x40		11	20 1/2"

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		96 3/4"	3
FN2	Fence 40x70		87 3/8"	2
FN3	Fence 40x70		42 1/2"	4
FN4	Fence 70x40		3 9/16"	3

Second floor schedule				
Mark	Type	Profile	Length	Count
CL1	Log 40x114		135 13/16"	5
CL2	Log 40x114		135 13/16"	5
CL3	Log 40x114		124 13/16"	1

Second Floor Schedule				
Mark	Type	Profile	Count	Length
FB2	FB 17x114		29	104 3/4"

Highland Bunkie 1 9/16" (127 15/16"x115 3/4")

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1*	40X114	1	35 15/16"
1LG-2*	40X114	1	68 5/8"
1LG-3*	40X114	1	107 1/16"
1LG-4	40X114	8	135 13/16"
1LG-5*	40X114	1	135 13/16"
1LG-6	40X114	18	52 11/16"

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	135 13/16"
3LG-1*	40X114	1	35 15/16"
3LG-2*	40X114	1	68 5/8"
3LG-3*	40X114	1	107 1/16"
3LG-4	40X114	38	135 13/16"
3LG-5*	40X114	1	135 13/16"

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	18	31 1/2"
BLG-2	40X114	9	123 5/8"
BLG-3	40X114	1	133 7/16"
BLG-4	40X114	1	143 5/16"
BLG-5	40X114	1	153 1/8"
BLG-6	40X114	1	163"
BLG-7	40X114	1	163"
BLG-8	40X114	15	163"
BTL-1	40X114	1	166 15/16"

Wall 2			
Mark	Profile	Count	Cut Length



2BL-1	40X57	1	21 7/8"
2BL-2	40X57	1	80 1/2"
2LG-1	40X114	26	21 7/8"
2LG-2	40X114	1	135 13/16"
2LG-3	40X114	9	28 1/8"
2LG-4	40X114	8	80 1/2"
2LG-5	40X114	4	135 13/16"

* Gable - delivered premounted


Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	18	123 5/8"
ALG-2	40X114	1	133 7/16"
ALG-3	40X114	1	143 5/16"
ALG-4	40X114	1	153 1/8"
ALG-5	40X114	1	163"
ALG-6	40X114	1	163"
ALG-7	40X114	15	163"
ATL-1	40X114	1	166 15/16"

Log profiles	
Profile	Profile

40X57	
40X114	

Log profiles	
Profile	Profile

40X114	
40X114	